


INSTRUCTION FOR FITTING REPLACEMENT DOOR GASKET TO FW400H & FW400L



1. Using a sharp bladed knife make an incision in the soft part of the gasket in the top corner on the inner and outer. (See fig 1).
2. Once the gasket has been cut tear it away from the door. If it does not tear easily carefully cut the gasket taking care not to damage the plastic door extrusion.
3. With the gasket removed from the door check that the groove in the extrusion is not obstructed.
4. Insert the replacement into the plastic groove in the extrusion (see fig2), starting at the top middle of the door. Continue by inserting the gasket into the middle on both sides followed by insertion into the bottom centre. To complete press the gasket firmly into place ensuring that it is flat and even all the way around the door.
5. Close the door and check that it closes properly and that the gasket seals correctly

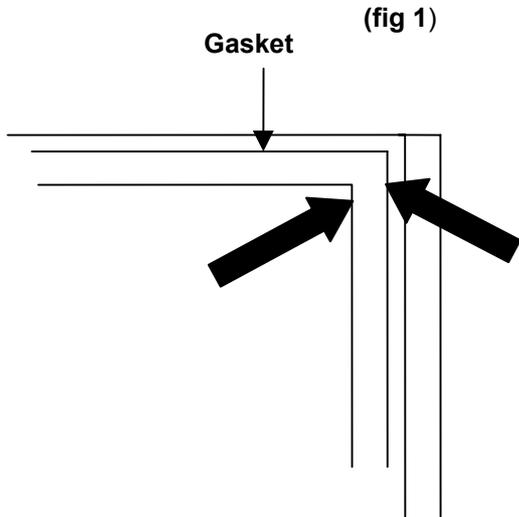